



Architectural Linear

LS 8FT


Recessed



Product Ordering Guide

Sample

LS86 - 40F - WS - RM

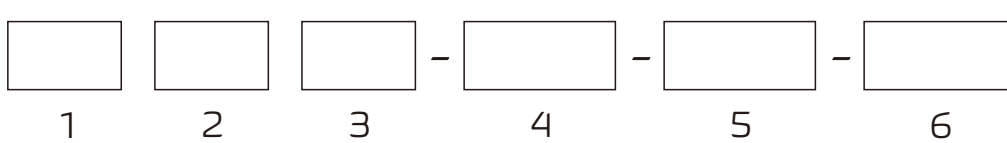

1. Base Model

LS

2. Length

8 8 feet

3. Aperture

6 6 inch

4. CCT (Choose one)

35F 3500K 40F 4000K

5. System Wattage (Choose one)

WS Wattage Selectable (Except for 2ft fixture)

NS Fixed Wattage

6. Mounting Option (Choose one)

SM Surface Mounted

RM Recessed

LS SERIES

Architectural LED Luminaire

OKTUSA | Architectural Lighting Enthusiast

Specification

Model	Dimension	Wattage	CCT	Efficacy	Luminous Flux
LS86	6"X8'	80W	3500K/4000K	94	7520lm

Performance Summary

Input Voltage	100-277V AC
Color Rendering Index (CRI)	Ra>80
Power Factor	PF>0.90
Dimming Style	1-10V Dimming
Beam Angle	112°
Mounting	Recessed
Warranty	5 Years

Regulatory & Voluntary Qualifications

UL Listed	Yes
Damp rated	Yes

Dimension

