

1. Unpack and check the luminaire and accessories.
Wear work gloves to keep the light clean, avoiding any oil or dirt transferred to it.

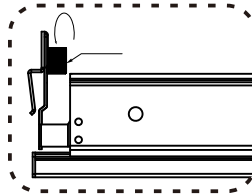


Figure1

2. Turn off the main power.

3. Unlock the two nuts at the ends of the linear light (Figure1).

4. Install the linear light to ceiling grid and tighten the two terminal nuts. (Figure2 and Figure3)

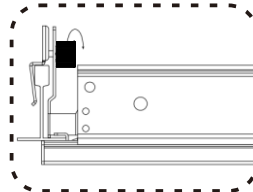


Figure2

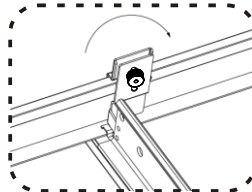


Figure3

5. Unlock the nuts from both end of Junction Box. (Figure4)

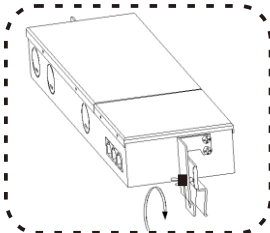


Figure4

6. Secure the junction box to the linear light and tighten the two terminal nuts. (Figure5 and Figure6)

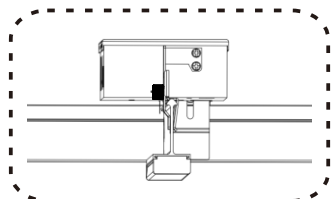


Figure5

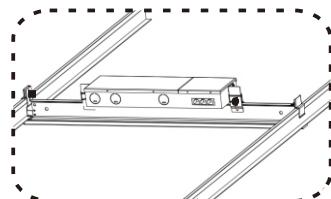


Figure6

7. Connect the connector(RJ45) from LED lighting unit to the output connector of Junction Box. (Figure7)
Please note one driver can only support max 3 units. (Figure8)

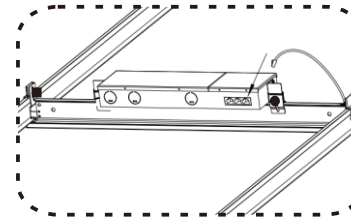


Figure7

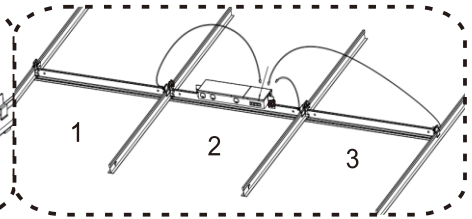


Figure8

8. Open the Junction Box, connect the L(Live), N(Neutral), G (Ground) wires by using the 4-pin connectors and connect the dimming wire with the orange connector cap.

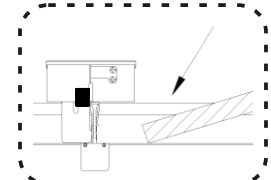
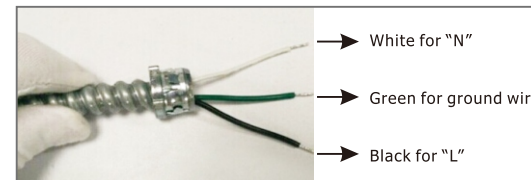


Figure9

9. Cover the plasterboard to finish installation and ensure there is no opening at ceiling. (Figure9 and Figure10)


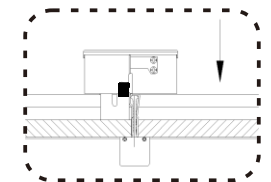


Figure10

Wiring Diagram



T-Grid Linear Light

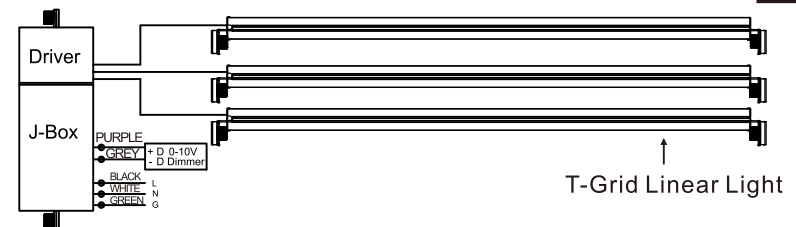

ATTENTION: Install in accordance with national and local building and electrical codes.